



IP protection class:
IP66/ IP68/ IP69

A-A

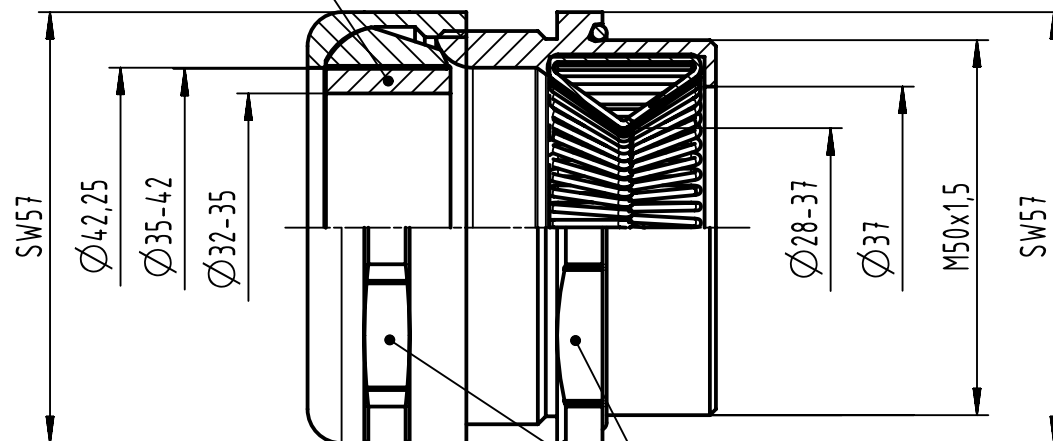

tightening torque:
30Nm

Tighten the pressure screw until the sealing insert is flush with the outer edge of the pressure screw. Do not exceed the maximum permissible tightening torque.
Note: It is possible to exceed it.
This applies to walls with threads and through-holes with a locknut.

	All rights reserved Department EL PD	All Dimensions in mm Original Size DIN A4	Scale 1:1	Free size tol.		Ref.
		HARTING D-32339 Espelkamp	Created by DEIMEL	Inspected by KROPIEWICKI	Standardisation	Date 2023-10-16
Title Han CGM-M-Rail EMC M50 32-42 mm						Doc-Key / ECM-Nr. 101026826/UGD/002/A 500000255437
		Type TB	Number 19 62 000 7086		Rev. A	Page 1/1